


A2FRM- Ex "d" Cable Gland	
Size	: 16mm to 90mm & 3/8" to 3 1/2"
Standard	: EN60079-0:2018, EN60079-1:2014, EN60079-31:2014/2013
Function	: Providing flameproof seal on outer sheaths of all types of unarmoured cable in indoor and outdoor hazardous area with swivel male rigid conduit connection. Designed to prevent cold flow
ATEX Certificate No.	: TI16ATEX 671-2 X
EAC Certificate No.	: TC RU C-IN.ГБ08.В.02588
Code of Protection	: Ex db IIC Gb, Ex tb IIIC Db
Ingress Protection	: IP66 as per EN 60529.
Operating Temp.	: -60°C to +125°C
Material	: Brass CW614N/CW617N/EN12165, Stainless Steel 316L
Thread	: Metric, NPT, BSP, ET and PG
Features	: Displacement Seal
Seal Material	: LSOH Silicone Seal & Nylon Washer
Standard Accessories	: IP Washer (Thread Seal)
Optional Accessories	: Shroud, Lock Nut, Earth Tag, Serrated Washer, Ingress Disc

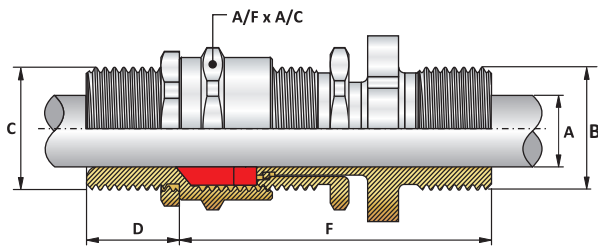

Gland Selection Chart														
Size	Standard Thread Size "C"			Optional Thread		Thread Length "D"	Conduit Connection Thread "B"			Cable Dia. A		Protrusion Length "F"	A/F	A/C
	Metric	NPT/BSP	ET	Metric	NPT/BSP		Metric	NPT	BSP	Min.	Max.			
16	16	3/8"	5/8"	-	-	15.00	20	1/2"	1/2"	3.10	8.60	49.25	24.00	26.20
20s16	20	1/2"	3/4"	25	3/4"	15.00	20	1/2"	1/2"	3.10	8.60	49.25	24.00	26.20
20S	20	1/2"	3/4"	25	3/4"	15.00	20	1/2"	1/2"	6.10	11.70	49.00	24.00	26.20
20	20	1/2"	3/4"	25	3/4"	15.00	20	1/2"	1/2"	6.50	13.90	49.50	27.00	29.50
25	25	3/4"	1"	32	1"	15.00	25	3/4"	3/4"	11.30	19.90	58.00	36.00	39.20
32	32	1"	1 1/4"	40	1 1/4"	15.00	32	1"	1"	17.00	26.20	60.50	41.00	45.00
40	40	1 1/4"	1 1/2"	50	1 1/2"	15.00	40	1 1/4"	1 1/4"	23.60	32.10	62.00	50.00	55.00
50S	50	1 1/2"	2"	63	2"	15.00	50	1 1/2"	1 1/2"	31.50	38.20	61.50	55.00	60.00
50	50	2"	2"	63	2 1/2"	15.00	50	1 1/2"	1 1/2"	35.80	44.00	63.75	60.00	65.00
63S	63	2"	2 1/2"	75	2 1/2"	15.00	63	2"	2"	41.70	50.00	68.50	70.00	75.00
63	63	2 1/2"	2 1/2"	75	3"	15.00	63	2"	2"	47.50	56.00	68.50	75.00	80.00
75S	75	2 1/2"	3"	90	3"	15.00	75	2 1/2"	2 1/2"	55.00	62.00	75.00	80.00	85.00
75	75	3"	3"	90	3 1/2"	15.00	75	2 1/2"	2 1/2"	62.00	68.00	75.00	85.00	90.00
90	90	3 1/2"	3 1/2"	100	4"	18.00	90	3"	3"	67.00	79.00	95.50	110.00	118.00

Product Code for Ordering Purpose						
Size	Type	Material	Entry Thread Type "C"	Conduit Connection Thread Type "B"	Shroud Type	Accessories
20s16	A2FRM	Brass-1	Standard Metric-11	Standard Metric-11	PVC Shroud-PS	Lock Nut-5
		Stainless Steel-2	Standard NPT-12	Standard NPT-12	LSF Shroud-LS	IP Washer-6
		Nickel Plated-3	ET Thread-13	BSP Thread-15	LSOH Shroud-SL	Serrated Washer-7
			BSP Thread-15	Optional Metric-16	PCP Shroud-PC	Ingress Disc-8
			Optional Metric-16	Optional NPT-17		Earth Tag-9
			Optional NPT-17	Optional BSP-20		

Ordering Information	
Code : 20s16A2FRM31111PS569	20s16=Gland Size, A2FRM=Gland Type, 3= With Nickle Plated Material,
A2FRM-20s16-M20(M)-M20(M) Nickle Plated Cable Gland Kit	11=Entry Metric Thread(C), 11=Conduit Thread(B), PS= With PVC Shroud, 5=With Lock Nut, 6=With IP Washer, 9=With Earthing Tag