


Alco Cable Gland

Size	: G204 to G755
Standard	: BS 6121: Part-1:2005, EN 50262:1999, IEC62444:2010
Function	: Provides mechanical cable retention & electrical continuity via armoured wire termination in dry indoor area for all types of SWA cables.
Ingress Protection	: IP2X
Material	: Brass CW614N, Stainless Steel
Thread	: Metric
Operating Temp.	: -60°C to +200°C
Cable Type	: Steel Wire Armour (SWA) Cable
Features	: Armoured Ring
Accessories	: Shroud, Lock Nut, Earth Tag

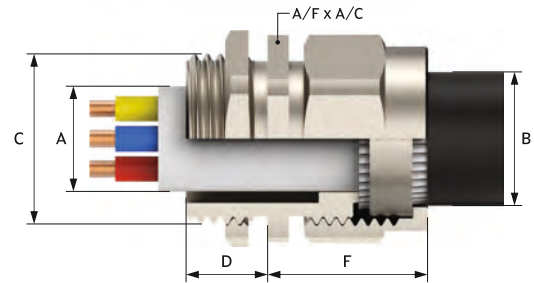

GLAND SELECTION CHART

Size	Standard Thread Size "C"	Thread Length "D"	Cable Dia.		Armour Wire Dia.	Protrusion Length "F"	A/F	A/C
	Metric		"A" Max.	"B" Max.				
G-204	M20x1.5	10.00	12.50	16.00	0.90-1.25	17.00	22.00	24.25
G-206	M20x1.5	10.00	15.00	20.00	0.90-1.25	17.50	24.00	26.20
G-254	M25x1.5	10.00	18.50	24.00	1.25-1.60	19.00	30.00	33.00
G-256	M25x1.5	10.00	20.50	27.00	1.25-1.60	20.25	32.00	35.00
G-324	M32x1.5	10.00	27.25	34.00	1.60-2.00	20.50	40.50	45.00
G-326	M32x1.5	10.00	27.25	34.00	1.60-2.00	20.50	40.50	45.00
G-405	M40x1.5	15.00	31.00	37.50	1.60-2.00	21.00	44.50	50.00
G-503	M50x1.5	15.00	34.50	41.00	2.00-2.50	22.00	47.50	52.00
G-505	M50x1.5	15.00	41.00	48.00	2.00-2.50	21.50	56.50	61.50
G-636	M63x1.5	15.00	44.50	54.00	2.50	24.25	61.00	65.00
G-753	M75x1.5	15.00	51.50	59.00	2.50	26.00	67.50	72.00
G-755	M75x1.5	15.00	56.75	65.00	2.50-3.15	26.00	75.00	80.00

PRODUCT CODE FOR ORDERING PURPOSE

Size	Type	Material	Thread Type	Shroud Type	Accessories
G-204	ALCO	Brass Nickel Plated-3	Standard Metric-11	PVC Shroud-PS LSF Shroud-LS	Lock Nut-5 Earth Tag-9

ORDERING INFORMATION

Code: G-204ALCO311PS6
ALCO G-204 Nickel Plated Cable Gland.

G-204=Gland Size, ALCO=Gland Code,
3=With Nickel Plated Brass Material, 11=With Standard
Metric Thread, PS=With PVC Shroud, 6=With IP Washer.