


PG Cable Gland

- Size** : PG 7 to PG 48 & M12 to M63
- Standard** : EN 60259
- Application** : Suitable for indoor and outdoor conditions for unarmoured cable.
- Ingress Protection** : IP54
- Material** : Nickel Plated Brass CW614N
- Cable Type** : Unarmoured Cable
- Thread** : PG and Metric
- Operating Temp.** : -25°C to +80°C
- Features** : Inner Compression Seal
- Accessories** : Shroud, Lock Nut

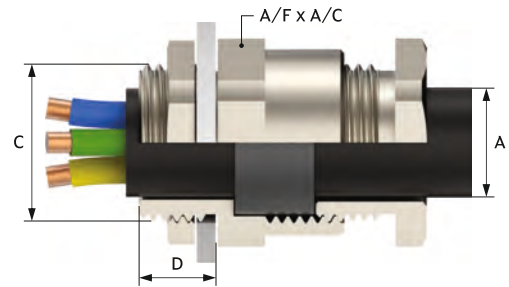

GLAND SELECTION CHART

Size	Thread "C"	Thread Length "D"	Cable Dia. "A"		A/F	A/C	Cat No.
			Min.	Max.			
PG7	PG7	5.00	6.00	8.00	14.00	15.50	CPG-7
PG9	PG9	6.00	8.00	10.00	17.00	19.50	CPG-9
PG11	PG11	6.00	10.00	12.00	20.00	22.25	CPG-11
PG13.5	PG13.5	6.50	12.00	14.00	22.00	24.25	CPG-13
PG16	PG16	6.50	14.00	16.00	24.00	26.50	CPG-16
PG21	PG21	7.00	17.00	19.00	30.00	33.00	CPG-21
PG29	PG29	8.00	18.00	25.00	40.00	44.00	CPG-29
PG36	PG36	9.00	33.00	35.00	50.00	54.25	CPG-36
PG42	PG42	10.00	39.00	41.00	57.00	64.00	CPG-42
PG48	PG48	10.00	45.00	47.00	64.00	72.00	CPG-48

Size	Thread "C"	Thread Length "D"	Cable Dia. "A"		A/F	A/C	Cat No.
			Min.	Max.			
12	M 12	5.00	4.20	6.00	14.00	15.50	CPGM-12
16	M 16	5.00	2.10	9.80	18.00	20.00	CPGM-16
20	M 20	6.00	3.00	14.10	22.00	24.25	CPGM-20
25	M 25	7.00	7.75	18.00	27.00	29.35	CPGM-25
32	M 32	8.00	15.50	25.20	34.00	37.00	CPGM-32
40	M 40	8.00	22.40	32.90	42.00	45.00	CPGM-40
50	M 50	9.00	31.00	42.10	52.00	56.00	CPGM-50
63	M 63	10.00	41.00	51.20	66.00	72.00	CPGM-63