


### Reducer

- Size** : 16mm to 63mm
- Function** : We offer a range of reducer for industrial and hazardous area application which provide effectiveness connection between cable entry devices and equipment having dis-similar thread. Reducers are designed to reduce dis-similar thread.
- Ingress Protection** : IP68 as per EN 60529.
- Operating Temp.** : -60°C to +125°C
- Material** : Brass Nickle Plated
- Thread** : Metric (EN50262)

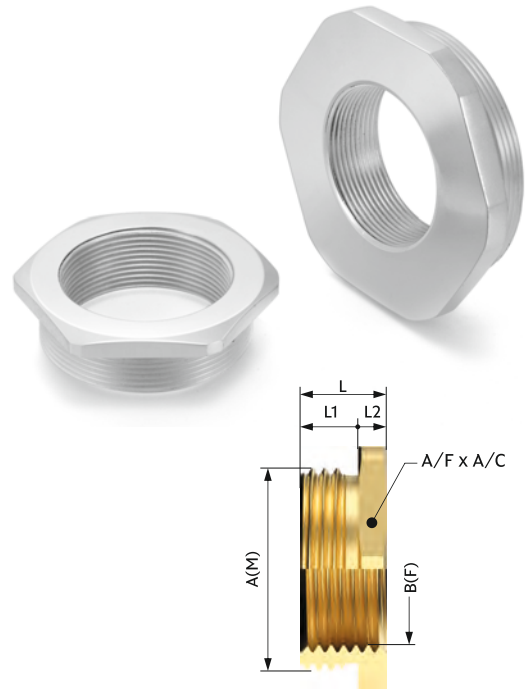

### GLAND SELECTION CHART

Item Code	Thread		Total Length "L"	Thread Length "L1"	Hex Length "L2"	A/F	A/C	Pack Pcs
	A (M)	B (F)						
CHRM-08-06	M8x1.25	M6x1.0	13.00	5.00	8.00	11.00	-	50.00
CHRM-10-06	M10x1.5	M6x1.0	8.00	5.00	3.00	13.00	-	50.00
CHRM-10-08	M10x1.5	M8x1.25	13.00	5.00	8.00	13.00	-	50.00
CHRM-12-08	M12x1.5	M8x1.25	8.00	5.00	3.00	15.00	-	50.00
CHRM-12-10	M12x1.5	M10x1.5	13.00	5.00	8.00	15.00	-	50.00
CHRM-16-10	M16x1.5	M10x1.5	8.00	5.00	3.00	18.00	-	50.00
CHRM-16-12	M16x1.5	M12x1.5	8.00	5.00	3.00	18.00	-	50.00
CHRM-20-12	M20x1.5	M12x1.5	9.00	6.00	3.00	24.00	26.20	50.00
CHRM-20-16	M20x1.5	M16x1.5	9.00	6.00	3.00	24.00	26.20	50.00
CHRM-25-16	M25x1.5	M16x1.5	10.50	7.00	3.50	30.00	33.00	25.00
CHRM-25-20	M25x1.5	M20x1.5	10.50	7.00	3.50	30.00	33.00	25.00
CHRM-32-20	M32x1.5	M20x1.5	12.00	8.00	4.00	36.00	39.20	25.00
CHRM-32-25	M32x1.5	M25x1.5	12.00	8.00	4.00	36.00	39.20	25.00
CHRM-40-25	M40x1.5	M25x1.5	12.50	8.00	4.50	46.00	50.60	10.00
CHRM-40-32	M40x1.5	M32x1.5	12.50	8.00	4.50	46.00	50.60	10.00
CHRM-50-32	M50x1.5	M32x1.5	14.00	9.00	5.00	55.00	60.00	10.00
CHRM-50-40	M50x1.5	M40x1.5	14.00	9.00	5.00	55.00	60.00	10.00
CHRM-63-40	M63x1.5	M40x1.5	15.50	10.00	5.50	70.00	75.00	10.00
CHRM-63-50	M63x1.5	M50x1.5	15.50	10.00	5.50	70.00	75.00	10.00
CHRM-75-50	M75x1.5	M50x1.5	17.00	11.00	6.00	80.00	85.00	10.00
CHRM-75-63	M75x1.5	M63x1.5	17.00	11.00	6.00	80.00	85.00	10.00

### ORDERING INFORMATION

**Item Code** : CHRM-16-12  
**Item Name** : M16 x M12 Reducer

- Reducer will be supplied with Brass Nickle Plated Material
- Lock Nut and IP Washer will be provided on request
- Also available as per customer requirement