


### TRS Cable Gland

- Size** : 16mm to 50mm
- Standard** : BS 6121: Part-1:2005, EN 50262:1999, IEC62444:2010
- Function** : Recommended for use with braided, co-axial or SWA cables. A rubber seal compresses on cable to provide a tight fit against cable.
- Ingress Protection** : IP66/67
- Material** : Brass CW614N
- Thread** : Metric
- Features** : Outer Compression Seal
- Accessories** : Shroud, Lock Nut, Earth Tag

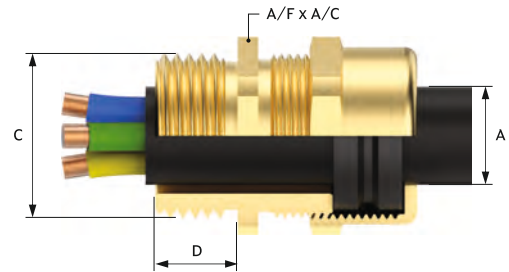

### GLAND SELECTION CHART

Gland Size	Entry Thread "C" Metric	Thread Length "D"	Cable Diameter "A"		A/F	A/C
			Min.	Max.		
16	M16x1.5	8.00	3.00	7.00	22.00	24.00
20S	M20x1.5	10.00	7.00	10.00	22.00	24.00
20	M20x1.5	10.00	10.00	14.50	26.00	28.50
25	M25x1.5	10.00	14.50	20.50	35.00	38.00
32	M32x1.5	10.00	20.50	26.50	40.00	45.00
40	M40x1.5	15.00	26.50	34.50	47.00	52.00
50	M50x1.5	15.00	34.50	43.50	59.00	65.00

### PRODUCT CODE FOR ORDERING PURPOSE

Size	Type	Material	Thread Type	Shroud Type	Accessories
16	TRS	Brass-1	Standard Metric-11	PVC Shroud-PS	Lock Nut-5 Earth Tag-9

### ORDERING INFORMATION

**Code : 16TRS11PS6**  
TRS-M16 Nickel Plated Cable Gland.

16=Gland Size, TRS=Gland Code,  
1= With Brass Material, 11=With Standard Metric Thread,  
PS= With PVC Shroud, 6=With IP washer.