


Nylon Cable Gland

Size	: PG 7 to PG 48 and M12 to M63
Application	: Suitable for indoor and outdoor conditions for unarmoured cable. Mostly used in motors, junction boxes, machinery, equipment, etc
Ingress Protection	: IP66
Thread	: Metric, PG
Material	: Nylon Polyamide
Accessories	: Lock Nut

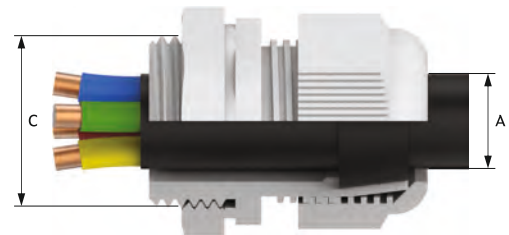

PG THREAD CABLE GLAND SELECTION CHART

Gland Size	Thread "C"	Cable Range Dia. "A"		CAT NO.
		Min.	Max.	
7	PG-7	3.00	6.50	CNCG-07
9	PG-9	4.00	8.00	CNCG-09
11	PG-11	5.00	10.00	CNCG-11
13.5	PG-13.5	6.00	12.00	CNCG-13
16	PG-16	10.00	14.00	CNCG-16
21	PG-21	13.00	18.00	CNCG-21
25	PG-25	16.00	21.00	CNCG-25
26	PG-29	18.00	25.00	CNCG-26
36	PG-36	22.00	32.00	CNCG-36
42	PG-42	28.00	38.00	CNCG-42
48	PG-48	35.00	45.00	CNCG-48

METRIC THREAD CABLE GLAND SELECTION CHART

Gland Size	Thread "C"	Cable Range Dia. "A"		CAT NO.
		Min.	Max.	
12	M12	3.00	6.00	CMCG-12
16	M16	5.00	10.00	CMCG-16
20	M20	8.00	13.00	CMCG-20
25	M25	10.00	17.00	CMCG-25
32	M32	15.00	21.00	CMCG-32
40	M40	19.00	28.00	CMCG-40
50	M50	25.00	35.00	CMCG-50
63	M63	35.00	45.00	CMCG-63

Dimensions are in mm